

# UTEPO, PoE Injector (Gigabit/30W) Protección 6kv



**Marca:**

**Código del producto:** 1690, UTP7201GE-PSE30

**Disponibilidad:** In Stock

**Peso:** 0.00kg

**Dimensiones:** 0.00cm x 0.00cm x 0.00cm

## Short Description

Inyector PoE de un solo puerto con un puerto Ethernet, un puerto de salida PoE un puerto de alimentación de entrada de CA. Admite PoE de finalización y el consumo de potencia de salida es de hasta 30 W; Cuenta con: red 10 / 100M / 1000Mbps, distancia de transmisión de 100 m, protección contra rayos de 6KV, chip de nivel industrial y alerta de patente.

## Descripción

| Item             | Description           |                     |
|------------------|-----------------------|---------------------|
| <b>Interface</b> | Input Voltage         | AC100V~AC240V       |
|                  | Data Input            | 1×RJ45              |
|                  | PoE output            | 1×RJ45              |
| <b>PoE</b>       | PoE Power Supply Type | End-span            |
|                  | PoE Power Output      | DC 54V/30 watts     |
|                  | Output Ripple         | ?5%                 |
|                  | Power Pin Assignment  | Pair? 1/2(+),3/6(-) |
|                  | <b>Ethernet Port</b>  | Communication Port  |
|                  | TransmissionRate      | 10/100/1000Mbps     |
|                  | Transmission Medium   | Cat5/5e/6 Cable     |

|                    |                          |   |
|--------------------|--------------------------|---|
|                    | Distance                 | 100m (Max.)   |
| <b>Status</b>      | Power LED                | 1 (Red)   |
|                    | PoE LED                  | 1 (Orange)  |
| <b>Protection</b>  | Surge Protection         | PoE Power?1KV(Differential Mode),2KV(Common Mode)1.2/50us?8/20us<br>Ethernet?2KV(Differential Mode),6KV(Common Mode)10/7000us |
|                    | ESD                      | 1a Contact Discharge Level 3<br>1b Air Discharge Level 3<br>Per: IEC61000-4-2   |
| <b>Environment</b> | Working Temperature      | -10?~55?  |
|                    | Storage Temperature      | -40?~85?  |
|                    | Humidity(Non-condensing) | 0~90%   |
| <b>Mechanics</b>   | Dimension(LxWxH)         | 160mm×64mm×60mm   |
|                    | Material                 | ABS Plastics  |
|                    | Color                    | Black   |
|                    | Weight                   | 200g  |

## Easy Cabling for PoE Network


Transfer data and power simultaneously; Up to 30-watt PoE Capacity;  
Plug and Play; No need to change the existing devices;  
Up to 90% conversion efficiency; Lower heat radiation;

1



## 2 Industrial Chip

Industrial chip features higher operating capacity and stable transmission quality;

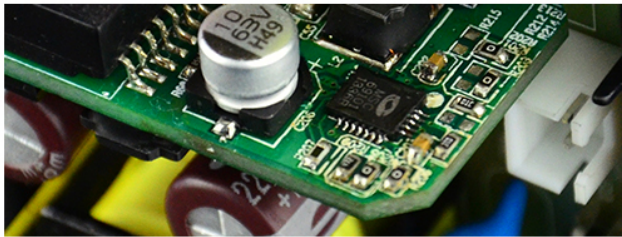

## Operate in Complex Environment

Superior anti-interference ability: 6KV lightning protection & 8KV ESD;  
Operating Temperature: -10°C ~ +55°C;  
Professional design: no fan, no noise, dustproof ;

3



## 4 Easy & Flexible Installation

Take cables in slot between the splicing units to simplify the cabling;  
Multiple installation design fits easily in many locations;  
Wide-angle LEDs indicate operating status;



Wall-mounting

Splicing

Wide-angle LED

